


1. Line up the guide point to **0-0-0-0**.
2. Pull the locking knob out.
3. With the locking knob pulled out, twist the rest mechanism away from you.
4. Turn the numbers to select the code sequence of your choice

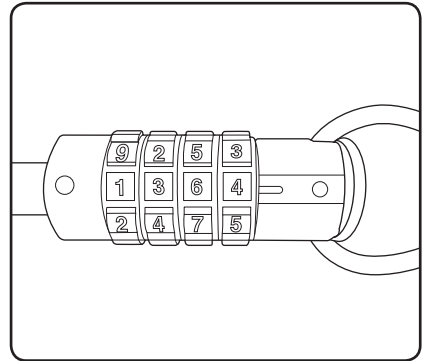

5. Twist the reset mechanism back towards you, then place the looped cable end into the cable groove and close the locking knob.
6. Turn the number to a random sequence to securely lock the cable.